


Keep up with us on



# VINTAGE 150

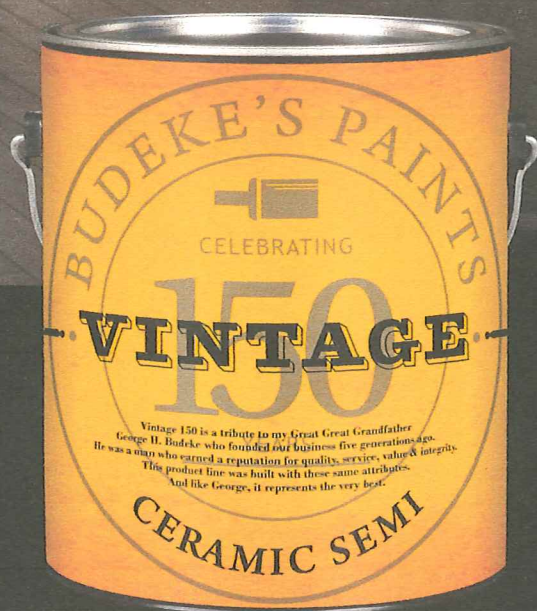

Advance Ceramic Technology (ACT) produces the ultimate in coating performance. ACT coatings produce tough durable films with superior stain resistance in any sheen. Finger prints, soil, grease and many other stains wash off easily with mild soap and water. Our ACT finishes outperform the leading national competitors. Our ACT product line is available in a wide variety of sheens.





**Vintage Ceramic  
Semi-Gloss  
LOW ODOR  
STAIN RESISTANT  
BN143 LINE**

Type	Sheen	Spread Rate	Recommended Application	Thinner	Clean Up	DRY TIME		
						Tack Free	Re-coat	Cure
100% Acrylic	Semi-Gloss	350 to 400 Sq Ft Per Gallon	Brush, Roller, Pad or Airless Spray	Clean Water	Warm Soapy Water	30 Minutes	2 Hours	30 Days
PRODUCT NAME: Vintage Ceramic Semi-Gloss		Vintage Ceramic Semi-Gloss is a 100% acrylic interior/exterior finish formulated with ceramic spheres to impart toughness and excellent stain resistance properties. The product is suitable for coating drywall, plaster, and masonry and primed wood or metal surfaces. The acrylic resin provides excellent color and gloss retention as well as tenacious adhesion properties. The ceramic spheres impart flow, leveling and stain removal characteristics.						
WHERE TO USE:		Drywall Plaster Wood Metal Masonry	This acrylic satin wall and trim paint is a very low odor, low VOC product, making it perfect for homes, hospitals, schools, or any area where odor is a concern. It provides a tough satin finish for use in high abuse areas					
Surface Preparation:		<p><b>New Work:</b> The surface to be coated must be clean and free of oil, grease, rust and other contaminants that could interfere with adhesion. Masonry surfaces should be fully cured.</p> <p><b>Priming:</b> Surfaces must be clean, dry and dull. Remove rust and any loose or flaking paint. Vintage Ceramic is self-priming on drywall and cured plaster or masonry surfaces; prime bare wood or metal. If you need to coat metal, bleeding wood or over stains ask one of our Paint Professional to recommend the appropriate primer.</p> <p><b>Repaint Work:</b> Remove any oil, chalk, dirt, wax or dust prior to re-coating. Any loose or flaking paint should be removed, patched and the edges feather sanded to produce a smooth, uniform surface. Dull glossy surfaces to insure good adhesion. On previously painted surfaces in good repair, no priming is generally necessary. Spot prime bare areas with this product or the primer indicated above.</p>						
Application:		<p>Stir product with a circular, lifting motion to disperse into a homogenous liquid. To achieve proper results a quality 3/8" nap roller cover is required when using product containing ceramic microspheres.</p> <p>Brush – Nylon or polyester filament.</p> <p>Airless Spray – Tip at atomization pressures will vary with type of equipment, viscosity and temperature. An orifice of .011 - .017 will provide the most satisfactory spray pattern.</p> <p>Best results are more likely obtained by using quality application tools. Do not apply directly over chalky surfaces or bleeding stains.</p>						
NOTE: Formulated without mercury or lead.								



**Vintage Ceramic  
Satin  
LOW ODOR  
STAIN RESISTANT  
BN142 LINE**

Type	Sheen	Spread Rate	Recommended Application	Thinner	Clean Up	DRY TIME		
						Tack Free	Re-coat	Cure
100% Acrylic	Satin	350 to 400 Sq Ft Per Gallon	Brush, Roller, Pad or Airless Spray	Clean Water	Warm Soapy Water	30 Minutes	4 Hours	30 Days
PRODUCT NAME: Vintage Ceramic Satin		Vintage Ceramic Satin is a 100% acrylic interior/exterior finish formulated with ceramic spheres to impart toughness and excellent stain resistance properties. The product is suitable for coating drywall, plaster, and masonry and primed wood or metal surfaces. The acrylic resin provides excellent color and gloss retention as well as tenacious adhesion properties. The ceramic spheres impart flow, leveling and stain removal characteristics.						
WHERE TO USE:		Drywall Plaster Wood Metal Masonry	This acrylic satin wall and trim paint is a very low odor, low VOC product, making it perfect for homes, hospitals, schools, or any area where odor is a concern. It provides a tough satin finish for use in high abuse areas					
Surface Preparation:		<p><b>New Work:</b> The surface to be coated must be clean and free of oil, grease, rust and other contaminants that could interfere with adhesion. Masonry surfaces should be fully cured.</p> <p><b>Priming:</b> Surfaces must be clean, dry and dull. Remove rust and any loose or flaking paint. Vintage Ceramic is self-priming on drywall and cured plaster or masonry surfaces; prime bare wood or metal. If you need to coat metal, bleeding wood or over stains ask one of our Paint Professional to recommend the appropriate primer.</p> <p><b>Repaint Work:</b> Remove any oil, chalk, dirt, wax or dust prior to re-coating. Any loose or flaking paint should be removed, patched and the edges feather sanded to produce a smooth, uniform surface. Dull glossy surfaces to insure good adhesion. On previously painted surfaces in good repair, no priming is generally necessary. Spot prime bare areas with this product or the primer indicated above.</p>						
Application:		<p>Stir product with a circular, lifting motion to disperse into a homogenous liquid. To achieve proper results a quality 3/8" nap roller cover is required when using product containing ceramic microspheres.</p> <p>Brush – Nylon or polyester filament.</p> <p>Airless Spray – Tip at atomization pressures will vary with type of equipment, viscosity and temperature. An orifice of .011 - .017 will provide the most satisfactory spray pattern. Best results are more likely obtained by using quality application tools. Do not apply directly over chalky surfaces or bleeding stains.</p>						
NOTE: Formulated without mercury or lead.								



**Vintage Ceramic  
Matte  
LOW ODOR  
STAIN RESISTANT  
BN140 LINE**

Type	Sheen	Spread Rate	Recommended Application	Thinner	Clean Up	DRY TIME		
						Tack Free	Re-coat	Cure
100% Acrylic	Matte	350 to 400 Sq Ft Per Gallon	Brush, Roller, Pad or Airless Spray	Clean Water	Warm Soapy Water	30 Minutes	4 Hours	30 Days
PRODUCT NAME: Vintage Ceramic Matte		Vintage Ceramic Matte is a premium quality interior, 100% acrylic, and low odor, matte wall paint, formulated with ceramic micro-spheres to impart excellent stain resistance properties. Finger prints, soil, grease, and many other stains wash off with mild soap and water without harming the film.						
WHERE TO USE:		Drywall Plaster Wood Metal Masonry	This matte latex wall paint is a very low odor, low VOC product, making it perfect for homes, hospitals, schools, or any area where odor is a concern. It allows the use of a matte finish in high use areas, with maximum durability.					
Surface Preparation:		<p><b>New Work:</b> The surface to be coated must be clean and free of oil, grease, rust and other contaminants that could interfere with adhesion. Masonry surfaces should be fully cured.</p> <p><b>Priming:</b> Surfaces must be clean, dry and dull. Remove rust and any loose or flaking paint. Vintage Ceramic is self-priming on drywall and cured plaster or masonry surfaces; prime bare wood or metal. If you need to coat metal, bleeding wood or over stains ask one of our Paint Professionals to recommend the appropriate primer.</p> <p><b>Repaint Work:</b> Remove any oil, chalk, dirt, wax or dust prior to re-coating. Any loose or flaking paint should be removed, patched and the edges feather sanded to produce a smooth, uniform surface. Dull glossy surfaces to insure good adhesion. On previously painted surfaces in good repair, no priming is generally necessary. Spot prime bare areas with this product or the primer indicated above.</p>						
Application:		<p>Stir product with a circular, lifting motion to disperse into a homogenous liquid. To achieve proper results a quality 3/8" nap roller cover is required when using product containing ceramic microspheres.</p> <p>Brush – Nylon or polyester filament.</p> <p>Airless Spray – Tip at atomization pressures will vary with type of equipment, viscosity and temperature. An orifice of .015 - .019 will provide the most satisfactory spray pattern.</p> <p>Best results are more likely obtained by using quality application tools. Do not apply directly over chalky surfaces or bleeding stains.</p>						
NOTE: Formulated without mercury or lead.								

# We're #1... and #2...and #3

*Budeke's Paints sweeps national competition*

Painting is a major investment in time and money. Superior paint saves you both.

Budeke's Paints recently captured gold, silver and bronze honors from an independent accredited laboratory. All national brands as well as other regional products were tested. Budeke's Paints interior semi-gloss paint rated the highest of all paints tested - with our Vintage 150 line scoring twice as high as the next closest competitor.



 **Gold Award:** Vintage 150 Ceramic Semi

 **Silver Award:** Vintage 150 Ceramic Satin

 **Bronze Award:** TechWise Satin



[www.budekes.com](http://www.budekes.com)



<b>Resin:</b>	100% Acrylic
<b>Solids:</b>	Volume – 37.5
<b>Weight Per Gallon:</b>	10.85 lbs.
<b>Viscosity:</b>	100 – 103 (Krebs Units)
<b>Specular Gloss:</b>	3 – 5% @ 85 degrees
<b>Recommended Film Thickness:</b>	Wet – 4.0 to 4.6 mils Dry – 1.5 to 1.7 mils
<b>VOC – VOS Statement:</b>	This product contains less than 50 grams per liter.
<b>Cautions:</b>	<p style="text-align: center;"><b>CAUTION!</b> Do not take internally. Close container after each use.</p> <p style="text-align: center;"><b>KEEP OUT OF REACH OF CHILDREN. KEEP FROM FREEZING.</b></p>

05/11/18

MANUFACTURED FOR:



Fells Point - Timonium

Budekes.com

<b>Resin:</b>	100% Acrylic
<b>Solids:</b>	Volume – 40.0
<b>Weight Per Gallon:</b>	10.82 lbs.
<b>Viscosity:</b>	100 – 104 (Krebs Units)
<b>Specular Gloss:</b>	22 – 28 @ 60 degrees
<b>Recommended Film Thickness:</b>	Wet – 4.0 to 4.6 mils Dry – 1.6 to 1.84 mils
<b>VOC – VOS Statement:</b>	This product contains less than 100 grams per liter.
<b>Cautions:</b>	<p style="text-align: center;"><b>CAUTION!</b> Do not take internally. Close container after each use.</p> <p style="text-align: center;"><b>KEEP OUT OF REACH OF CHILDREN.</b> <b>KEEP FROM FREEZING.</b></p>

05/11/18

MANUFACTURED FOR:



Fells Point - Timonium

Budekes.com

<b>Resin:</b>	100% Acrylic
<b>Solids:</b>	Volume – 37.5
<b>Weight Per Gallon:</b>	10.65 lbs.
<b>Viscosity:</b>	92 – 97 (Krebs Units)
<b>Specular Gloss:</b>	34 – 40 @ 60 degrees
<b>Recommended Film Thickness:</b>	Wet – 4.0 to 4.6 mils Dry – 1.5 to 1.7 mils
<b>VOC – VOS Statement:</b>	This product contains less than 100 grams per liter.
<b>Cautions:</b>	<p style="text-align: center;"><b>CAUTION!</b> Do not take internally. Close container after each use.</p> <p style="text-align: center;"><b>KEEP OUT OF REACH OF CHILDREN. KEEP FROM FREEZING.</b></p>

05/11/18

MANUFACTURED FOR:



Fells Point - Timonium

Budekes.com



# VINTAGE 150

---

## Advanced Ceramic Technology

Vintage 150 Ceramic is engineered with 100% acrylic resin and ceramic microspheres to create the ultimate in coating performance. Advanced Ceramic Technology coatings produce tough durable films with superior stain resistance in any sheen. Fingers prints, soil, grease, and many other stains wash off easily with mild soap and water without harming the film. Our ACT finishes outperform the leading national competitors.

Vintage 150 Interior Matte and Eggshell finishes create an elegant appearance that wears like iron. Vintage 150 Ceramic Satin and Semi-Gloss finishes provide a durable interior/exterior enamel finish that can be used on interior walls, doors and trim and on exterior metal and masonry surfaces. It resists spatter, levels beautifully and has very good hide. Available in a wide variety of sheens and provides a beautiful finish in any color!

### VINTAGE 150 CERAMIC INTERIOR MATTE

WALLS, CEILINGS

- Most exquisite designer finish
- Non-reflective on walls and ceilings
- Masks surface irregularities
- Good burnish resistance
- Very washable
- Excellent touch-up

### VINTAGE 150 CERAMIC INT/EXT SATIN

WALLS, TRIM, DOORS, CABINETRY

- Complements flat walls when used on trim, doors in the same space
- Higher degree of burnish resistance and scrubability
- Ideal for kid's rooms and laundry rooms

### VINTAGE 150 CERAMIC INTERIOR EGGSHELL

WALLS, CEILINGS

- Most widely specified wall finish
- Provides depth of color
- Low sheen when viewed from any angle
- Washable and ideal for most living spaces

### VINTAGE 150 CERAMIC INT/EXT SEMI

TRIM, DOORS, CABINETRY

- Higher traffic surfaces and areas with moisture such as kitchens and bathrooms
- Highly wasable
- Good light reflectance
- Good scuff resistance

**PREMIUM INTERIOR / EXTERIOR PAINT**